


HRC 350

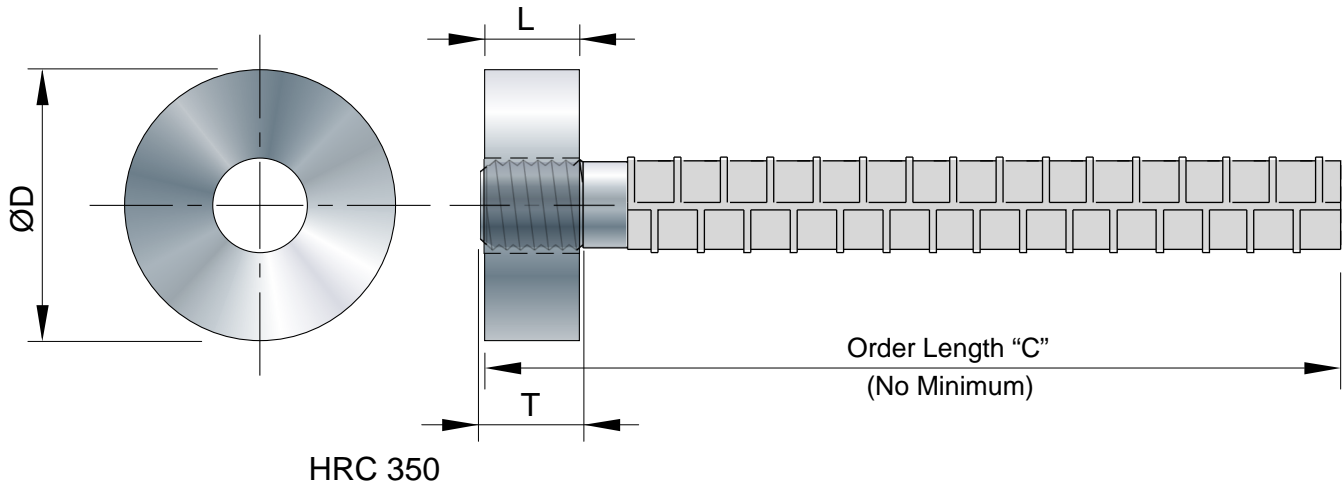

HRC 350 Series T-heads develop the minimum tensile strength of the rebar spliced (A706/A615). Hand tighten to snug fit. Lubricate threads and use pipe wrench if necessary.

Rebar Properties			Rebar Thread Information		HRC 350 Dimensions		
Bar Size	Diameter in	Area in ²	Thread Size UNC	T(min) Inch	ØD min Inch	Thread Size UNC	L Inch
#4	0.500	0.20	½"-13 UNC	0.75	1.13	½"-13 UNC	0.75
#5	0.625	0.31	⅝"-11 UNC	0.75	1.50	⅝"-11 UNC	0.75
#6	0.750	0.44	¾"-10 UNC	1.00	1.75	¾"-10 UNC	1.00
#7	0.875	0.60	⅞"-9 UNC	1.00	2.00	⅞"-9 UNC	1.00
#8	1.000	0.79	1"-8 UNC	1.125	2.25	1"-8 UNC	1.125
#9	1.128	1.00	1⅛"-7 UNC	1.5	2.63	1⅛"-7 UNC	1.5
#10	1.270	1.27	1¼"-7 UNC	1.625	3.00	1¼"-7 UNC	1.625
#11	1.410	1.56	M36 x 4	1.625	3.25	M36 x 4	1.625

Note: Tolerance -0"/+0.25"

All data subject to change without notice.

Rev. 24-0227



HEADED REINFORCEMENT CORP.
 11200 Condor Avenue • Fountain Valley, CA. 92708, USA
 Tel: 714-557-1455 • FAX: 714-557-4460 • www.HRC-USA.com